


Fender

ACOUSTIC PREVERB

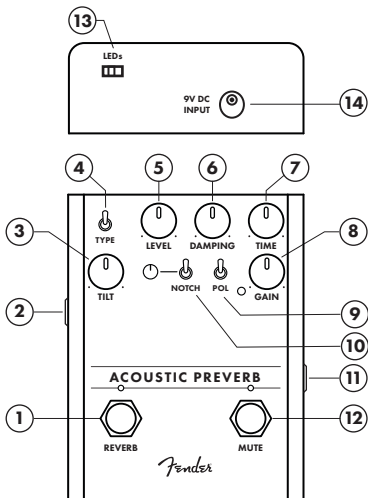

1. Reverb Footswitch/LED

2. Output Jack

3. Tilt

4. Type Switch

5. Level

6. Damping

7. Time

8. Gain Control/LED

9. Polarity Switch

10. Notch Switch/Control

11. Input Jack

12. Mute Footswitch/LED

13. LED Kill Switch

14. DC Power Connector



ACOUSTIC PREVERB

Reverb enhances the tone and natural beauty of an acoustic guitar, and Fender's Acoustic Preverb provides that and more. Featuring three reverb settings distinctly voiced for acoustic guitar, plus a high-fidelity preamp, this pedal is the ultimate ambience machine. A notch filter and polarity switch help eliminate feedback, while the "tilt" knob delivers overall EQ balance control .

Designed by our in-house team of experts, the Acoustic Preverb is an all-original Fender circuit. The chassis is crafted from lightweight, durable anodized aluminum, and the LED-backlit knobs easily show your control settings at a glance on dark stages.

DESIGNED IN CALIFORNIA, U.S.A.

Reverb Footswitch/LED

Activates reverb effect; LED illuminates.

Output Jack

Low-impedance output jack connects to amp or to next effect pedal in signal chain.

Tilt

Adjusts tonal balance from more bass heavy to more treble heavy. Response is flat when control is centered, and there are more high frequencies and less low frequencies as the control is rotated clockwise, and vice-versa.

Type Switch

Selects active reverb algorithm, or sound.

Level

Controls overall output level.

Damping

Controls how fast high frequencies decay in the reverb sound. Increasing this control will make the reverb tail darker as it fades out.

Time

Controls reverb decay time.

Gain Control/LED

Sets overall pedal sensitivity and allows for a broad range of instruments to be used. Peak LED will flicker when unit is close to distorting.

Polarity Switch

Inverts signal polarity (or "phase"), and is sometimes useful in reducing or eliminating unwanted feedback.

Notch Switch/Control

Switch engages or bypasses notch filter; control knob adjusts notch frequency. Notch filter can be used to reduce loudest feedback tone; try sweeping control slowly while instrument is feeding back until feedback stops.

Input Jack

High-impedance input suitable for electric guitar, bass, acoustic guitars with pickup systems, keyboards and other instruments.

Mute Footswitch/LED

Mutes audio and is useful when changing instruments or when taking a break. LED indicates mute status.

LED Kill Switch

Deactivates control-knob illumination.

DC Power Connector

Standard center-negative 9VDC jack for use with appropriate power supplies.

A PRODUCT OF
FENDER MUSICAL INSTRUMENTS CORPORATION
CORONA, CALIFORNIA, U.S.A.

Fender® is a registered trademark of FMIC.
Copyright © 2020 FMIC. All rights reserved.

PN 7720602000 REV. A

IMPORTANT SAFETY INSTRUCTIONS

- **WARNING:** To prevent damage, fire or shock hazard, do not expose the unit or its AC power to rain or moisture.
- Do not alter the AC plug of the connected power adapter
- Do not drip or splash liquids on the unit.
- No user serviceable parts inside, refer servicing to qualified personnel only.
- **WARNING:** The unit must only be connected to a safety agency certified, regulated, power source (adapter), approved for use and compliant with applicable local and national regulatory safety requirements.
- Unplug AC power adapter before cleaning unit exterior. Use only a damp cloth for cleaning; wait until unit is completely dry before reconnecting to power.
- Amplifiers and loudspeaker systems, and ear/headphones (if equipped) are capable of producing very high sound pressure levels, which may cause temporary or permanent hearing damage. Use care when setting and adjusting volume levels during use.

ADDITIONAL LANGUAGES

Manual available in additional languages at
www.fender.com/support

SPECIFICATIONS

IMPEDANCES POWER SUPPLY

Input: 820K Ω Output: 1K Ω
9VDC regulated adapter,
5.5 x 2.1 mm barrel connector, center negative
130mA @ 9VDC +——

POWER REQUIREMENTS

DIMENSIONS WEIGHT

4.84" x 3.74" x 1.77" (123mm x 95mm x 45mm)
1.32 lbs. (0.6kg)



Product specifications subject to change without notice



NOTES



© FENDER MUSICAL INSTRUMENTS 2020

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
箱体	O	O	O	O	O	O
喇叭单元*	O	O	O	O	O	O
电子部分	X	O	X	O	O	O
接线端子	X	O	O	O	O	O
电线	X	O	O	O	O	O
附件	O	O	O	O	O	O

本表格依据 SJ/T 11364 的规定编制。

O: 表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。

X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。

注: 含有有害物质的部件由于全球技术发展水平限制而无法实现有害物质的替代。

*产品含有喇叭单元时有效。