



LIVE TO PLAY LIVE®



M132 SUPER COMP

Dunlop
JIMDUNLOP.COM

92503001858 revD

M132 SUPER COMP

DESCRIPTION


- Classic Dyna Comp® style compression
- Attack Level control preserves attack volume without sacrificing sustain
- Compatible with the hottest pickups

POWER

The MXR Super Comp is powered by one 9-volt battery (remove bottom plate to install), a 9-volt AC adapter such as the Dunlop ECB003/ECB003E, or a DC Brick™ power supply.

CONTROLS


- 1** OUTPUT knob controls overall effect volume
- 2** ATTACK LEVEL knob sets attack attenuation level
- 3** SENSITIVITY knob sets overall amount of compression
- 4** FOOTSWITCH toggles effect on/bypass (red LED indicates on)

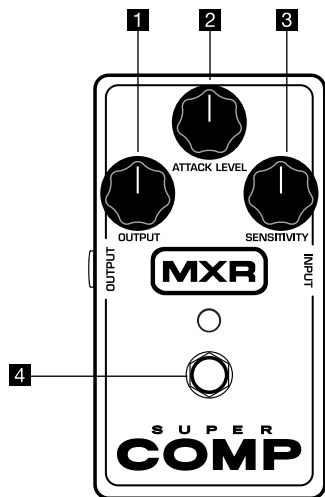

DIRECTIONS

- Run a cable from your guitar to the Super Comp's INPUT jack and another cable from the Super Comp's OUTPUT jack to your amplifier.
- Start with all controls at 12 o'clock.
- Turn the effect on by depressing the footswitch.
- Rotate the OUTPUT knob clockwise to increase overall effect volume or counterclockwise to decrease it.
- Rotate the ATTACK LEVEL knob clockwise to reduce volume attenuation of note upon attack or counterclockwise to increase it. For the classic Dyna Comp sound, rotate this control fully counterclockwise.
- Rotate the SENSITIVITY knob clockwise to increase amount of compression or counterclockwise to decrease it.

SAMPLE SETTINGS

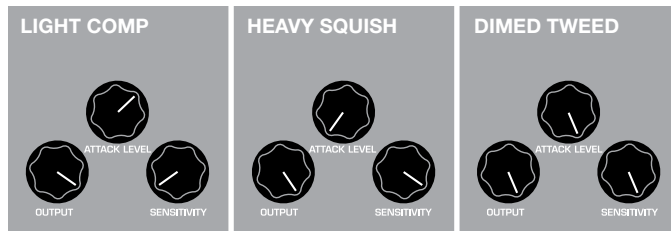

SPECIFICATIONS

Input Impedance	1 MΩ
Output Impedance	10 kΩ
Nominal Input Level	-5 dBV
Nominal Output Level	-12 dBV
Noise Floor*	-95 dBV
T.H.D 0.2% Typ. at -20 dBV, 1 kHz	
Maximum Compression	36 dB
Attack Time	5 ms
Release Time	1 s
Bypass	True Hardwire
Current Draw	3.3 mA
Power Supply	9 volts DC

*A-weighted



DUNLOP MANUFACTURING, INC.
P.O. BOX 846 BENICIA, CA 94510 U.S.A.
TEL: 1-707-745-2722 FAX: 1-707-745-2658