

RAMPAGE

U S E R ' S M A N U A L

R10

Electric Guitar Amplifier

ROCKTRON
C O R P O R A T I O N



Your Rocktron Rampage R10 electric guitar amplifier has been tested and complies with the following Standards and Directives as set forth by the European Union:

Council Directive(s): 89/336/EEC, 73/23/EEC

Standard(s): EN55 013: 1990/A12:1994, EN55 020: 1988,
EN60 065: 1993, EN60 555-2: 1987, EN60 555-3:
1987/A1: 1991

This means that this product has been designed to meet stringent guidelines on how much RF energy it can emit, and that it should be immune from other sources of interference when properly used. Improper use of this equipment could result in increased RF emissions, which may or may not interfere with other electronic products.

To insure against this possibility, always use good shielded cables for all audio input connections. This will help insure compliance with the Directive(s).

Contents

- PRECAUTIONS 1
- Front Panel 2
- Back Panel 2
- Specifications 3



Rocktron Corporation
2870 Technology Drive
Rochester Hills, MI 48309
USA

Phone: (248) 853-3055
Fax: (248) 853-5937

World Wide Web: <http://www.rocktron.com>
E-mail: rocktron@eaglequest.com

PRECAUTIONS

NOTE: IT IS VERY IMPORTANT THAT YOU READ THIS SECTION TO PROVIDE YEARS OF TROUBLE FREE USE. THIS UNIT REQUIRES CAREFUL HANDLING.


- All warnings on this equipment and in the operating instructions should be adhered to and all operating instructions should be followed.
- Do not use this equipment near water. Care should be taken so that objects do not fall and liquids are not spilled into the unit through any openings.
- The power cord should be unplugged from the outlet when left unused for a long period of time.

DO NOT ATTEMPT TO SERVICE THIS EQUIPMENT. THIS EQUIPMENT SHOULD BE SERVICED BY QUALIFIED PERSONNEL ONLY. DO NOT MAKE ANY INTERNAL ADJUSTMENTS OR ADDITIONS TO THIS EQUIPMENT AT ANY TIME. DO NOT TAMPER WITH INTERNAL ELECTRONIC COMPONENTS AT ANY TIME. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY VOID THE WARRANTY OF THIS EQUIPMENT, AS WELL AS CAUSING SHOCK HAZARD.

OPERATING TEMPERATURE

Do not expose this unit to excessive heat. This unit is designed to operate between 32° F and 104° F (0° C and 40° C). This unit may not function properly under extreme temperatures.

Front Panel

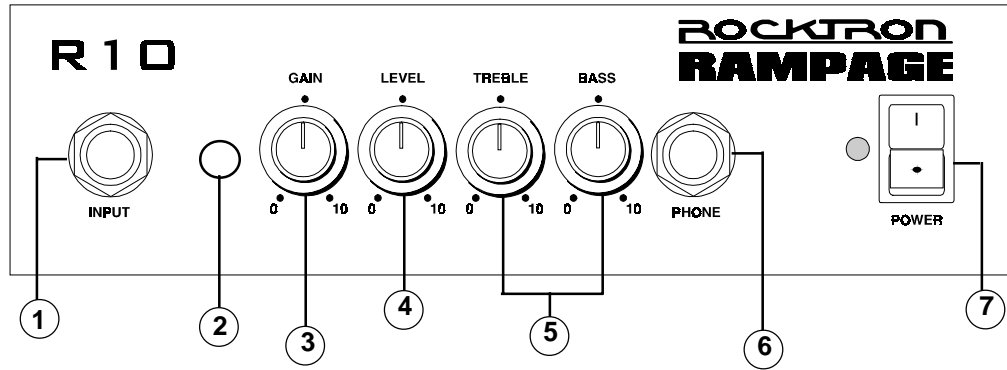

- ① **INPUT jack**
Connect your guitar output to the 1/4" input jack with a shielded guitar cable.
- ② **OVERDRIVE button**
When pressed IN, OVERDRIVE mode is engaged.
- ③ **GAIN control**
Adjusts the amount of amplification in the preamp. This sets the amount of harmonic distortion the amp will generate. Turn the knob clockwise to increase distortion and counterclockwise for a cleaner sound.
- ④ **LEVEL control**
The LEVEL control adjusts the volume. While GAIN sets the amount of amplification in the preamp, LEVEL sets the volume in the last stage of the unit. Once the GAIN is set, adjust the volume with the LEVEL control.
- ⑤ **TREBLE & BASS controls**
Tone controls, or EQ. The BASS raises or lowers the amount of low frequency sound while TREBLE does the same for the high frequencies.
- ⑥ **PHONE (Headphone) jack**
Plug your headphones into this jack to bypass the power amp and practice in private.
- ⑦ **POWER switch and LED**
The switch turns the amp ON and OFF. The red LED shows the amp is ON.

Back Panel



R10 Specifications

Power Output	10 Watts
Speaker Parameters	6" Velocity® High Definition by Rocktron
Dimensions	9.8" x 7.3" x 11.6" (250 x 185 x 295mm)
Weight	8lbs. 10 oz. (3.67Kg)
Power Requirement	100 Volts AC, 50/60Hz or 117 Volts AC, 50/60Hz or 220/240 Volts AC, 50/60Hz, as specified on chassis



CE Approved